

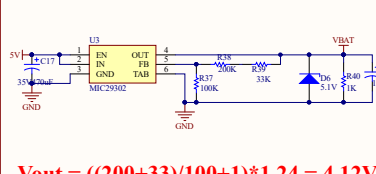



单片机(串口1)

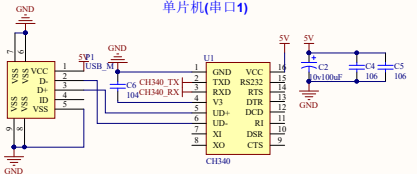

$$V_{out} = ((200+33)/100+1)*1.24 = 4.12V$$

5V

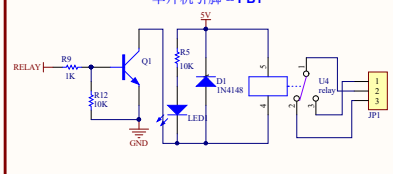


版本:V0.1(初版)




版本:V1.2(预售版)


1. 去掉模组运行指示灯
2. 修改模组NET和LET指示灯驱动电路
3. 修改模组PWRKEY引脚下拉电阻为0欧

3V3


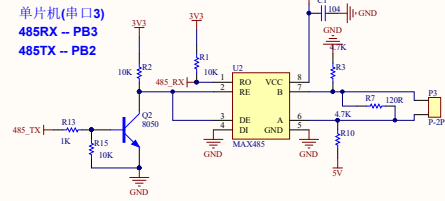


CAN TX – PA12

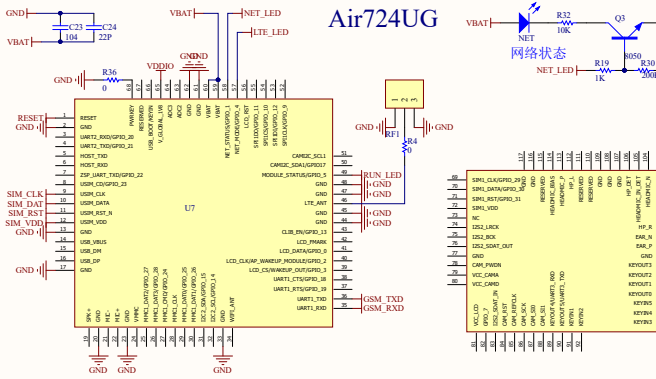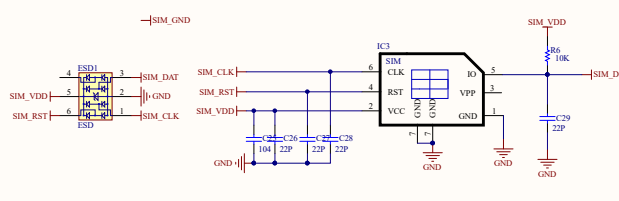


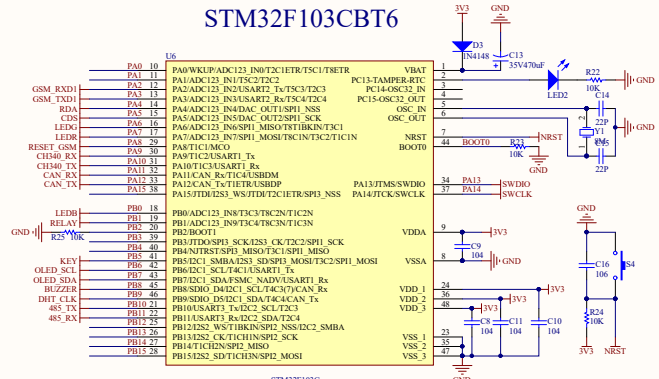

SDA -- PB7





PIN -- PB9






单片机(串口?)



LEDs: PBA



1. *Journal of the American Medical Association*, 1997; 277: 1039-1043.



所属系列:指路者系列

型号:ZLAir724UGA

Title		
Size A2	Number	Revision
Date: 2021/4/1	Sheet of	