



通信下载


单片机(串口1)

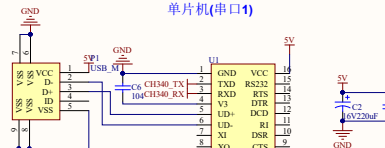


3.3V稳压



继电器(5脚10A)




蜂鸣器(PB8)




485通信

单片机(串口3)
485RX -- PB3
485TX -- PB2

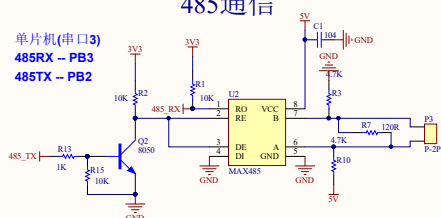


CAN总线(TJA1050)

CAN TX -- PA12
CAN RX -- PA11




ESP8266端子




温湿度传感器(DHT11)


PIN -- PB9




STM32F103CBT6

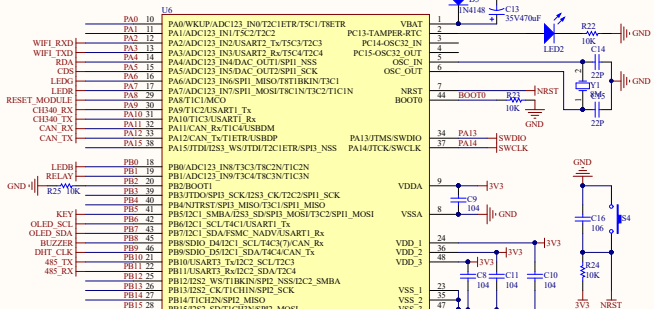

ESP8266

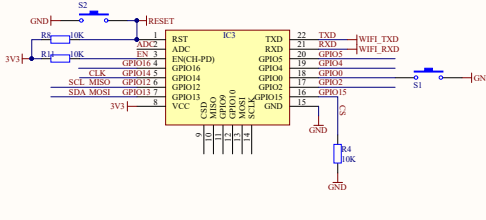


光敏电阻(PA5)




液晶(OLED)

SDA -- PB7
SCL -- PB6




程序下载



热释红外(RDB223)

PIN -- PA4




复位




三色灯(RGB)

LEDB -- PB0
LEDR -- PA7
LEDG -- PA6



STM32接口



按键(PB5)



所属系列:指路者系列

型号:ZLESP8266A

版本:V1.2(预售版)

1.型号:ZL8266S1

版本:V1.3(出售版)

1.修改型号为:ZLESP8266A

Title		
Size	Number	Revision
A2		
Date:	2020/12/26	Sheet of
File:	F:\Altium\Design\ZLESP8266A_SchDoc\Drawn By-	